

PULLERS





Ontario's Largest
Pneumatic & Hydraulic Tool Distributor

1-2430 Lucknow Drive, Mississauga, Ontario L5S 1V3. Tel: 905-672-5557 Fax: 905-672-5559
Email: sales@dobcoeqp.com www.dobcoeqp.com

FEATURES & BENEFITS

- Complete range of pullers in a variety of designs and capacities to suit any automotive or industrial application.
- Pullers are available up to 13 ton capacity, in 2 or 3 leg designs.
- Pressure screw threads are designed for quick, safe and easy adjustment even under load.
- Puller yokes & legs are drop-forged from the highest quality steel ensuring safe removal of stubborn gears, bearings and automotive parts.
- The NEW line of single operator pullers eliminates lost parts and the hassle of adjusting the legs/jaws.
- Bearing separators are available individually or in sets in up to 4 1/4" capacity.

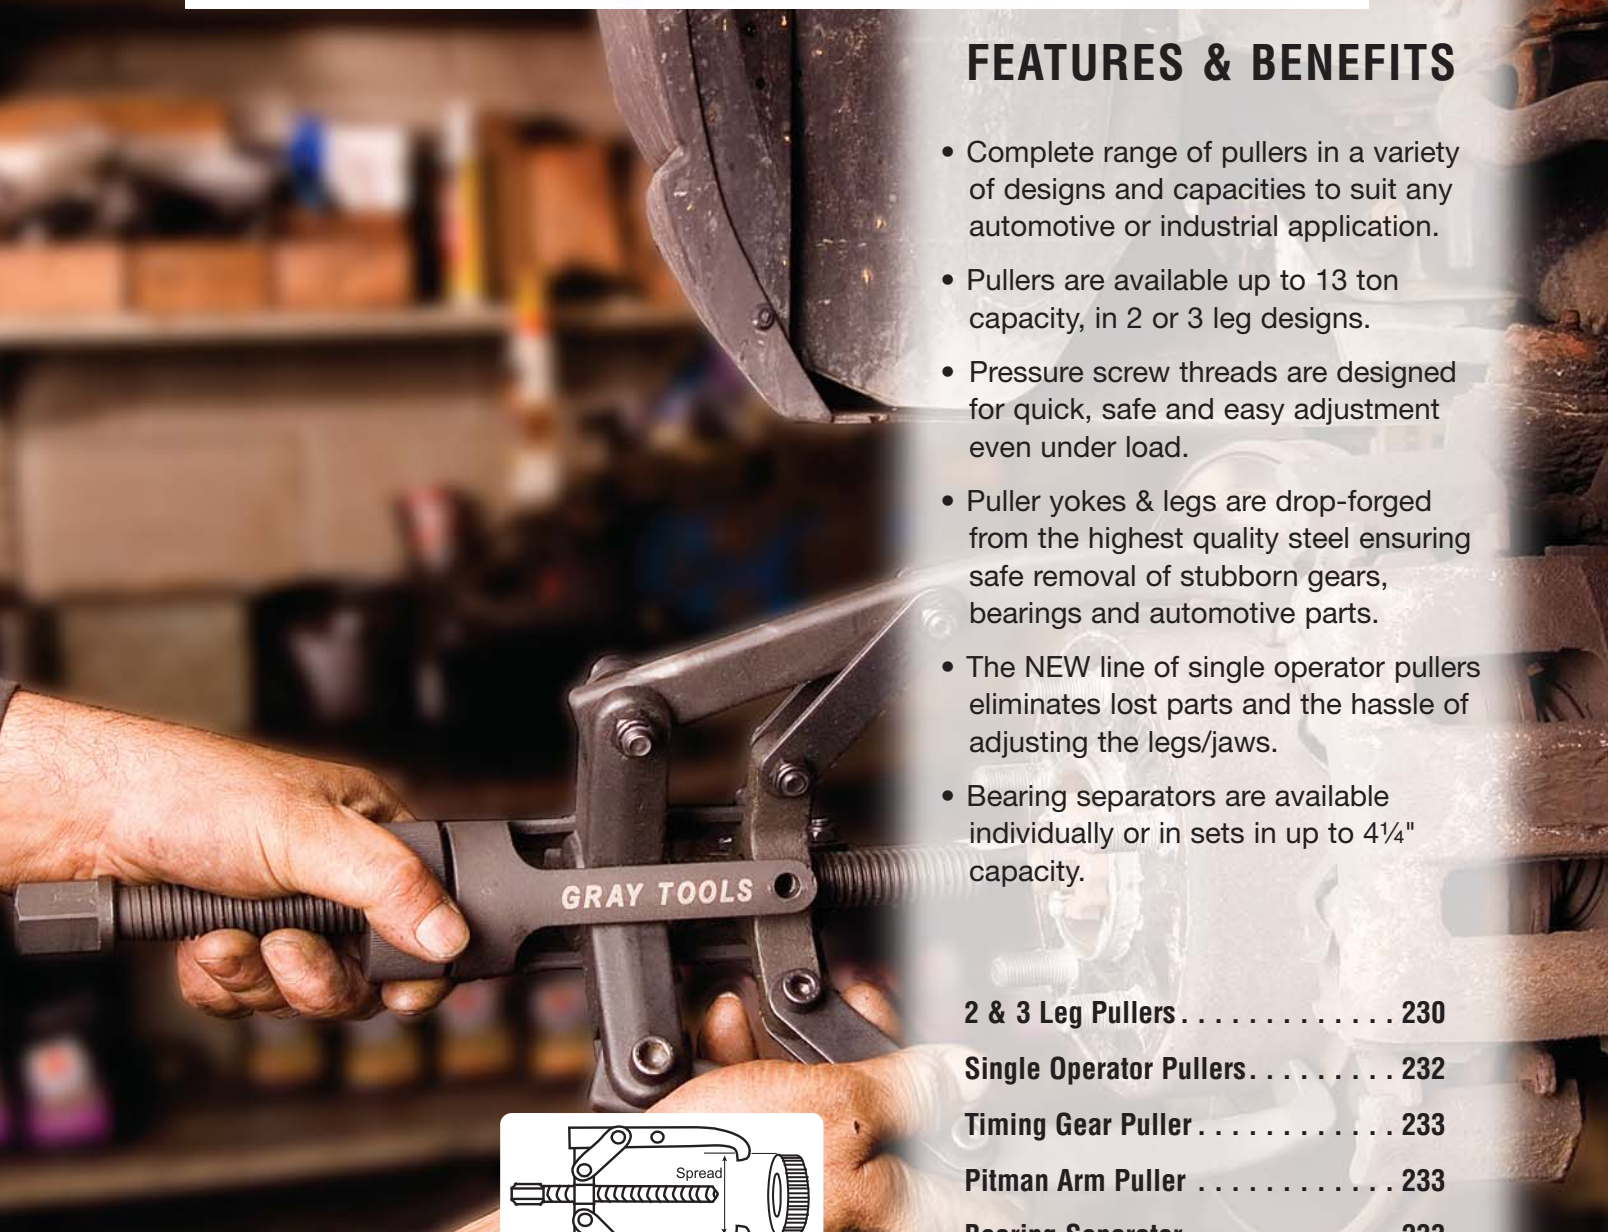

3 Important Factors When Choosing A Puller

Reach: is the distance from the base of the part to the flats of the jaws. The puller you select must have a reach greater than the distance from the end of the shaft to behind the gear or wheel being pulled.

Spread: is the distance between the puller's legs/jaws and must be greater than the diameter of the part being pulled.

Capacity: is the amount of force the puller is capable of exerting without damaging itself or the part being removed. The diameter of the pressure screw should be half as large as the shaft on which it will be used.

2 & 3 Leg Pullers	230
Single Operator Pullers	232
Timing Gear Puller	233
Pitman Arm Puller	233
Bearing Separator	233
Harmonic Balancer	233
Axle Puller	234
Pilot Bearing Puller	234
Universal Hub Puller	234
Steering Wheel Puller	234
Puller & Separator Sets	235



995



996

1 Ton Capacity, Adjustable Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
995	2 Jaw	2 1/8"	3 1/4"	5/16"-24 x 3 7/8" lg.	0.3 lb.
996	3 Jaw	2 1/8"	3 1/4"	5/16"-24 x 3 7/8" lg.	0.5 lb.



999A



P010A

2 Ton Capacity, Adjustable & Reversible Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
999A	2 Jaw	3 3/8"	4"	3/8"-24 x 4 7/8" lg.	0.9 lb.
P010A	3 Jaw	3 3/8"	4 3/4"	3/8"-24 x 4 7/8" lg.	1.3 lbs.



1001



P011

5 Ton Capacity, Reversible Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
1001	2 Jaw	3 1/4"	6"	9/16"-20 x 6 15/16" lg.	1.8 lbs.
P011	2/3 Jaw	3 1/4"	7"	9/16"-20 x 6 15/16" lg.	2.8 lbs.



999LA



P013A

5 Ton Capacity, Adjustable & Reversible Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
999LA	2 Jaw	5 1/2"	6"	9/16"-20 x 6 15/16" lg.	2 lbs.
P013A	2/3 Jaw	5 1/2"	7"	9/16"-20 x 6 15/16" lg.	3.5 lbs.

SAFETY WARNING

- Be sure puller is aligned & jaws are fully seated on part to be pulled.
- Do not modify or heat puller parts; this causes loss of strength and voids the product warranty.
- When possible use a larger sized puller to avoid potential overloading.


7 Ton Capacity, Reversible Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
1002	2 Jaw	5"	9"	1 ¹ / ₁₆ "-18 x 9" lg.	4.1 lbs.
P012	2/3 Jaw	5"	10 ¹ / ₂ "	1 ¹ / ₁₆ "-18 x 9" lg.	6.3 lbs.



7 Ton Capacity, Adjustable Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
1004	2 Jaw	8 ³ / ₄ "	9 ¹ / ₂ "	1 ¹ / ₁₆ "-18 x 9" lg.	5.2 lbs.
P012L	2/3 Jaw	8 ³ / ₄ "	11"	1 ¹ / ₁₆ "-18 x 9" lg.	8.1 lbs.

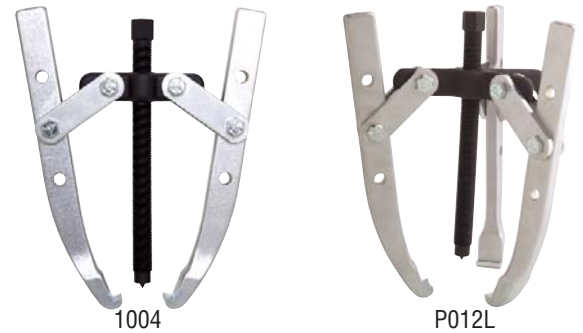

13 Ton Capacity, Adjustable Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
1003	Std. 2 Jaw	11"	12 ¹ / ₂ "	1 ³ / ₁₆ "-16 x 12" lg.	10.5 lbs.
1006	Long 2 Jaw	15 ¹ / ₄ "	15 ¹ / ₂ "	1 ³ / ₁₆ "-16 x 12" lg.	11.6 lbs.



13 Ton Capacity, Adjustable Jaw Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
P014	Std. 2/3 Jaw	11"	14"	1 ³ / ₁₆ "-16 x 12" lg.	15.3 lbs.
P017	Long 2/3 Jaw	15 ¹ / ₄ "	17"	1 ³ / ₁₆ "-16 x 12" lg.	16.3 lbs.





P202T

NEW



P302T

2 Ton Capacity, Single Operator Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
P202T	2 Jaw	3"	4½"	5/8"-8 x 7½" lg.	2 lb.
P302T	3 Jaw	3"	4½"	5/8"-8 x 7½" lg.	3 lb.

NEW SINGLE OPERATOR PULLERS

- Unique fixed leg design allows for easy one person operation
- Pressure screw threads designed for easy adjustment and high torque application



P205T

NEW



P305T

5 Ton Capacity, Single Operator Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
P205T	2 Jaw	5½"	9½"	¾"-8 x 11¾" lg.	7 lb.
P305T	3 Jaw	5½"	9½"	¾"-8 x 11¾" lg.	8 lb.

NEW SINGLE OPERATOR PULLERS

- Yoke and legs are drop-forged from alloy steel
- Black oxide finish



P210T

NEW



P310T

10 Ton Capacity, Single Operator Puller

Part No.	Description	Reach max.	Spread max.	Screw Size	Weight
P210T	2 Jaw	9"	15"	7/8"-6 x 15¾" lg.	17.5 lb.
P310T	3 Jaw	9"	15"	7/8"-6 x 15¾" lg.	19 lb.

Timing Gear Puller

Part No.	Description	Screw Size	Spread range	Width of of puller block	Weight
P309	Puller*	3/8" -16" x 13" lg.	1 1/2" to 4 1/4"	4 7/8"	1.6 lbs.

*Use for servicing crankshaft pulleys & timing gears



Pitman Arm Puller

Part No.	Description	Weight
P190	Pulls tie rod ends on front wheel drive cars	2.0 lbs.




Pilot Bearing Puller

Part No.	Description	Jaw Spread	Centre Rod	Weight
P498	2-Jaw Slide Hammer	1/2" to 1 1/2"	1/2"-13" x 13 lg.	3.6 lbs.



Bearing Separator

Part No.	Description	Weight
P501	0" - 2 1/4" capacity Use with No. 1001, P011, 999LA, P013A or P309	1.4 lbs.
P503	0" - 4 1/4" capacity Use with No. 1002, P012, 1004, P012L	5.5 lbs.




Harmonic Balancer Puller

Part No.	Description	Weight
P200	Span 1 1/2" to 4 1/2", 6 ton 2-Way	2.5 lbs.

Contains 5 sets of side bolts, includes:

- 2 each: 3/8" - 16" x 4"
- 3 each: 3/8" - 24" x 2"
- 3 each: 5/16" - 18" x 2"
- 3 each: M8 - 1.25" x 80mm
- 3 each: M10 - 1.50" x 50mm



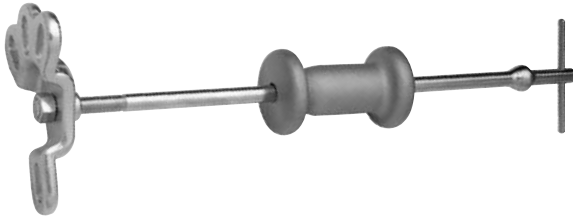

Axle Puller - Flange Type

Part No.	Description	Sliding hammer	Centre Rod	Weight
P499	Flange-Type, Bolt Circle range 4½" to 5½"	5 lbs.	⅝" - 18" x 32"	9.4 lbs.



Pilot Bearing Puller

Part No.	Description	Weight
88110	Range ½" to 1½" inside diameter	1.7 lbs



Universal Hub Puller

Part No.	Description	Centre screw	Weight
827	Universal Hub Puller,	1" - 14" x 9" with 1⅛" hex head	9.0 lbs.

Three legs can be adjusted to an 8" diameter bolt circle.



Steering Wheel Puller

Part No.	Description	Weight
P187	Steering-Wheel Puller	2.2 lbs.

Includes five sets of side bolts:


- 2 each: ¼" - 28" x 3"
- 2 each: ⅝" - 24" x 3½"
- 2 each: ⅝" - 28" x 4½"
- 2 each: ⅜" - 16" x 4"
- 2 each: M8 - 1.25" x 80mm

No. P040
Lock-On Jaw Puller Set, 6 Ton Capacity
2 Jaw/3 Jaw Internal and External

NEW

Description	Assembly	Inside Spread	Outside Spread
2-Jaw	2 short legs	1½" - 4½"	¾" - 5"
	3 long legs	2¾" - 5½"	¾" - 7½"
3-Jaw	2 short legs	1½" - 4¾"	1" - 4½"
	3 long legs	3¼" - 6¼"	1" - 6¼"

Weight: 6.8 lbs.

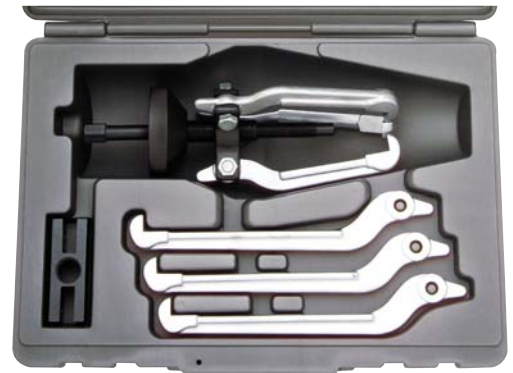

No. P050A
4" Gear Puller Set, 2 Ton Capacity

Assembles to make two standard reversible gear pullers.

NEW

Description	Reach	Spread	Screw Size
	Max	Max	
2-Jaw	3¾"	4"	¾" - 24" x 47/8" lg.
3-Jaw	3¾"	4¾"	¾" - 24" x 47/8" lg.

Weight: 1.5 lbs.



No. P060A
6", 7" Gear Puller Set, 5 Ton Capacity

Assembles to make four standard reversible gear pullers.

NEW

Description	Reach	Spread	Screw Size
	Max	Max	
2-Jaw	3¼"	6"	¼" - 20" x 6¹⁵⁄₁₆" lg.
3 Jaw	3¼"	7"	¼" - 20" x 6¹⁵⁄₁₆" lg.
2-Jaw	5½"	6"	¼" - 20" x 6¹⁵⁄₁₆" lg.
3 Jaw	5½"	7"	¼" - 20" x 6¹⁵⁄₁₆" lg.

Weight: 4.0 lbs.



No. P070
9", 10", 11" Gear Puller Set, 7 Ton Capacity

Assembles to make 2 adjustable and 2 reversible gear pullers.

Description	Reach	Spread	Screw Size
	Max	Max	
2-Jaw	5½"	9"	1¼" - 18" x 9" lg.
2 and 3 Jaw	5½"	10"	1¼" - 18" x 9" lg.
2-Jaw	9"	10"	1¼" - 18" x 9" lg.
2 and 3 Jaw	9"	11"	1¼" - 18" x 9" lg.

Weight: 10.7 lbs.





No. P210 Harmonic Balancer & Steering Wheel Puller Set

Includes eight sets of side bolts:

- 3 each: 3/8" - 16" x 4"
- 3 each: 3/8" - 24" x 2"
- 3 each: 5/16" - 18" x 2"
- 3 each: M8 - 1.25" x 80mm
- 3 each: M10 - 1.50" x 50mm
- 2 each: 1/4" - 28" x 3"
- 2 each: 5/16" - 24" x 3 1/2"
- 3 each: 5/16" - 18" x 4 1/2"

Weight: 4.0 lbs.



No. P50109 2 Pieces Bearing Separator Puller Set

Part No.	Description
P501	0" - 2 1/4" capacity
P309	Timing gear puller

Weight: 3.0 lbs.



No. P5013A 2 Pieces Bearing Separator Set

Part No.	Description
P501	0" - 2 1/4" capacity
P503	0" - 4 1/4" capacity

Weight: 6.9 lbs.